

producator ELNA Service, Ucraina



CATALOG

SUPORT ELECTRIC PROSOAPE

reprezentant in Romania SC Signal UP SRL

 www.panouriuden-s.ro

Avantaje

SUPORT PROSOP ELECTRIC

- Nu necesita centrala
- Puteti porni si opri oricand

Economisiti energie

- Consum redus de electricitate (precum un bec de 50-180W)

Usor de instalat

- Nu necesita servicii sanitare sau de oprire a apei

Siguranta

- Cablul dublu izolat nu are contact cu carcasa metalica

Universalitate

- Poate fi instalat in orice parte a cladirii



powder
coated
steel



Vertical 6 swivel



stainless
steel



Suport prosop electric Pivotent Elna 6

OTEL ACOPERIT CU PUDRA

Inaltime (mm)	Latime (mm)	Adancime (mm)
750	400	60

OTEL INOXIDABIL

Inaltime (mm)	Latime (mm)	Adancime (mm)
710	400	60

Descriere:

Suport prosop electric	
clasa otelului	AISI 304 / 08 KP
Finisaj	Acoperit cu pudra
Element de incalzire	Fibra de sticla
Nivel de protectie	clasa 2
Performanta, W	50
Temperatura de incalzire	44-56°
Pachetul contine	Suport prosop electric, manual de instr., kit de montare
Garantie	2 Ani



TM





powder
coated
steel



Elna 6 swivel



stainless
steel



Suport prosop electric mobil Elna 6

OTEL ACOPERIT CU PUDRA

Inaltime (mm)	Latime (mm)	Adancime (mm)
665	430	130

Otel inoxidabil

Inaltime (mm)	Latime (mm)	Adancime (mm)
665	430	130


Descriere:

Suport prosop electric	
Clasa otelului	AISI 304 / 08 KP
Finisaj	Acoperit cu pudra
Element de incalzire	Fibra de sticla
Nivel de protectie	clasa 2
Performanta, W	57-73
Temperatura de incalzire	55-75°
Pachetul contine	Suport prosop electric, manual de instr., kit de montare
Garantie	2 Ani



TM



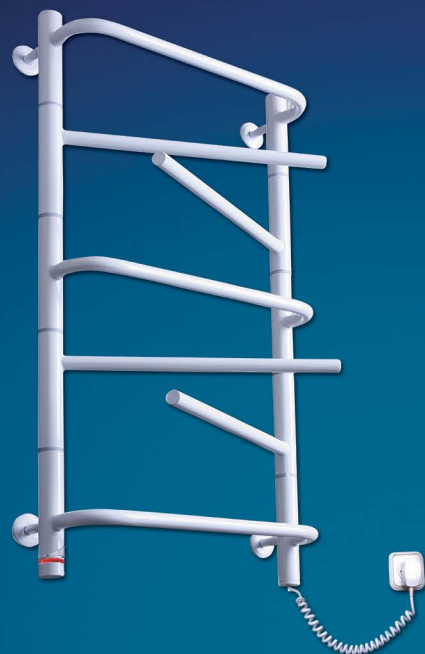

powder
coated
steel



Elna 7 swivel



stainless
steel



Suport Prosop Electric Mobil Elna 7

OTEL ACOPERIT CU PUDRA

Inaltime (mm)	Latime (mm)	Adancime (mm)
830	430	130

OTEL INOXIDABIL

Inaltime (mm)	Latime (mm)	Adancime (mm)
825	430	130

Descriere:

Suport prosop electric	
Clasa otelului	AISI 304 / 08 KP
Finisaj	Acoperit cu pudra
Element de incalzire	Fibra de sticla
Nivel de protectie	2 class
Performanta, W	83
Temperatura de incalzire	73-94°
Pachetul contine	Suport prosop electric, manual de instr., kit de montare
Garantie	2 Ani



TM





powder
coated
steel



Elna 9 swivel



stainless
steel



Suport Prosop Electric Mobil Elna 9

OTEL ACOPERIT CU PUDRA

Inaltime (mm)	Latime (mm)	Adancime (mm)
995	530	130

STAINLESS STEEL

Inaltime (mm)	Latime (mm)	Adancime (mm)
985	530	130

Descriere:

Suport prosop electric	
Clasa otelului	AISI 304 / 08 KP
Finisaj	Acoperit cu pudra
Element de incalzire	Fibra de sticla
Nivel de protectie	clasa 2
Performanta, W	106-133
Temperatura de incalzire	55-75°
Pachetul contine	Suport prosop electric, manual de instr., kit de montare
Garantie	2 Ani



TM



Lesenka

powder
coated
steel



stainless
steel



Suport Prosop Electric Fix Elna

OTEL ACOPERIT CU PUDRA

	Inaltime (mm)	Latime (mm)	Adancime (mm)
4	530	400	60
7	760	480	60
9	920	480	60

Stainless steel

	Inaltime (mm)	Latime (mm)	Adancime (mm)
4	550	400	60
7	760	480	60
9	920	480	60

Descriere:

Suport prosop electric	
Clasa otelului	AISI 304 / 08 KP
Finisaj	Acoperit cu pudra
Element de incalzire	Fibra de sticla
Nivel de protectie	clasa 2
Performanta, W	40-52, 68-85, 103-129
Temperatura de incalzire	55-75°
Pachetul contine	Suport prosop electric, manual de instr., kit de montare
Garantie	2 Ani



TM





powder
coated
steel



Standart 6



stainless
steel



Suport Prosop Electric Fix Elna 6

OTEL ACOPERIT CU PUDRA

Inaltime (mm)	Latime (mm)	Adancime (mm)
675	480	130

STAINLESS STEEL

Inaltime (mm)	Latime (mm)	Adancime (mm)
680	480	130

Descriere:

Suport prosop electric	
Clasa otelului	AISI 304 / 08 KP
Finisaj	Acoperit cu pudra
Element de incalzire	Fibra de sticla
Nivel de protectie	clasa 2
Performanta, W	85-106
Temperatura de incalzire	55-75°
Pachetul contine	Suport prosop electric, manual de instr., kit de montare
Garantie	2 Ani



TM






powder
coated
steel



Standart 8

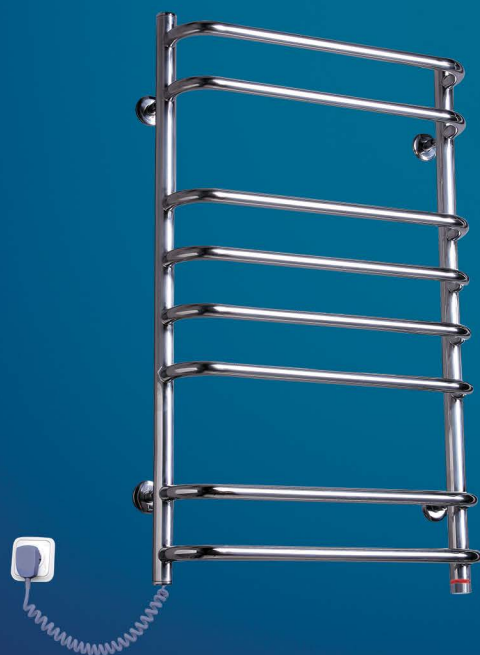

stainless
steel



Suport Prosop Electric Fix Elna 8

OTEL ACOPERIT CU PUDRA

Inaltime (mm)	Latime (mm)	Adancime (mm)
820	480	130

STAINLESS STEEL

Inaltime (mm)	Latime (mm)	Adancime (mm)
840	480	130

Descriere:

Suport prosop electric	
Clasa otelului	AISI 304 / 08 KP
Finisaj	Acoperit cu pudra
Element de incalzire	Fibra de sticla
Nivel de protectie	clasa 2
Performanta, W	112-140
Temperatura de incalzire	55-75°
Pachetul include	Heated Towel Rail, instruction manual, wall mounting kit
Garantie	2 Ani



TM

